


PROFIX 2 PLUS

hidden fixing system

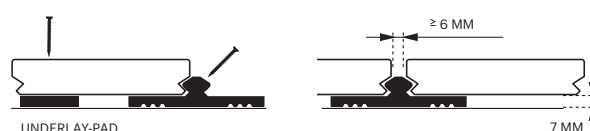


For 92 – 160 mm wide decking boards

MAJOR ADVANTAGES

- Keeps decking boards dryer due to 7 mm gap between boards and joists (sub barrier)
- Better air ventilation enables longer lifespan of the decking
- Suitable for year-round outdoor use (within a temperature range of -35 to 80 °C)
- Clean and elegant appearance without visible screws
- Consistent 6 mm gaps between deck boards
- Quick and easy installation of the deck

PROFIX 2 PLUS PRODUCT DETAILS

Material	high-density polyethylene (HDPE)
Dimensions (mm)	width 35 height 20,1 length 90
No. required	2.2 clips per metre
Package size	100 clips per box
Article	Profix2 Plus 100 pcs/box

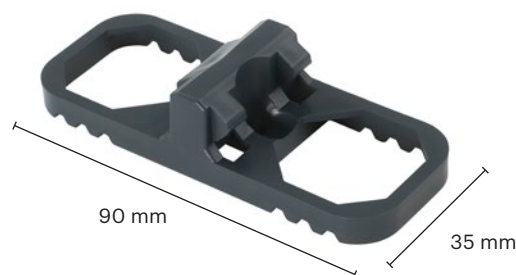

UNDERLAY-PADS PRODUCT DETAILS

Material	Rubber granulate
Dimensions (mm)	8x60x90 mm
Usage	Under the first and the last board
Package size	24 pads per package
Article	Underlay-Pads 24 pcs/box



Finnish Lunawood Thermowood is a beautiful wood material produced using natural methods, heat and steam. Thermowood is dimensionally stable, resistant to decay and non toxic. It can be used for interior and exterior applications. Lunawood is an eco-friendly natural product, which is easy to machine and install.

Installation instructions

> lunawood.com/downloads

Lunawood decking products

> lunawood.com/products/decking



LUNAWOOD.COM

This brochure is provided for information purposes only and no liability or responsibility of any kind is accepted by Lunawood or their representatives, although Lunawood has used reasonable efforts to verify the accuracy of any advice, recommendation or information. Lunawood reserves the right to alteration of its products, product information and product range without any notice.