




LUNAWOOD

JUKOLA 3D- TEXTURE

26X92

INSTALLATION GUIDE

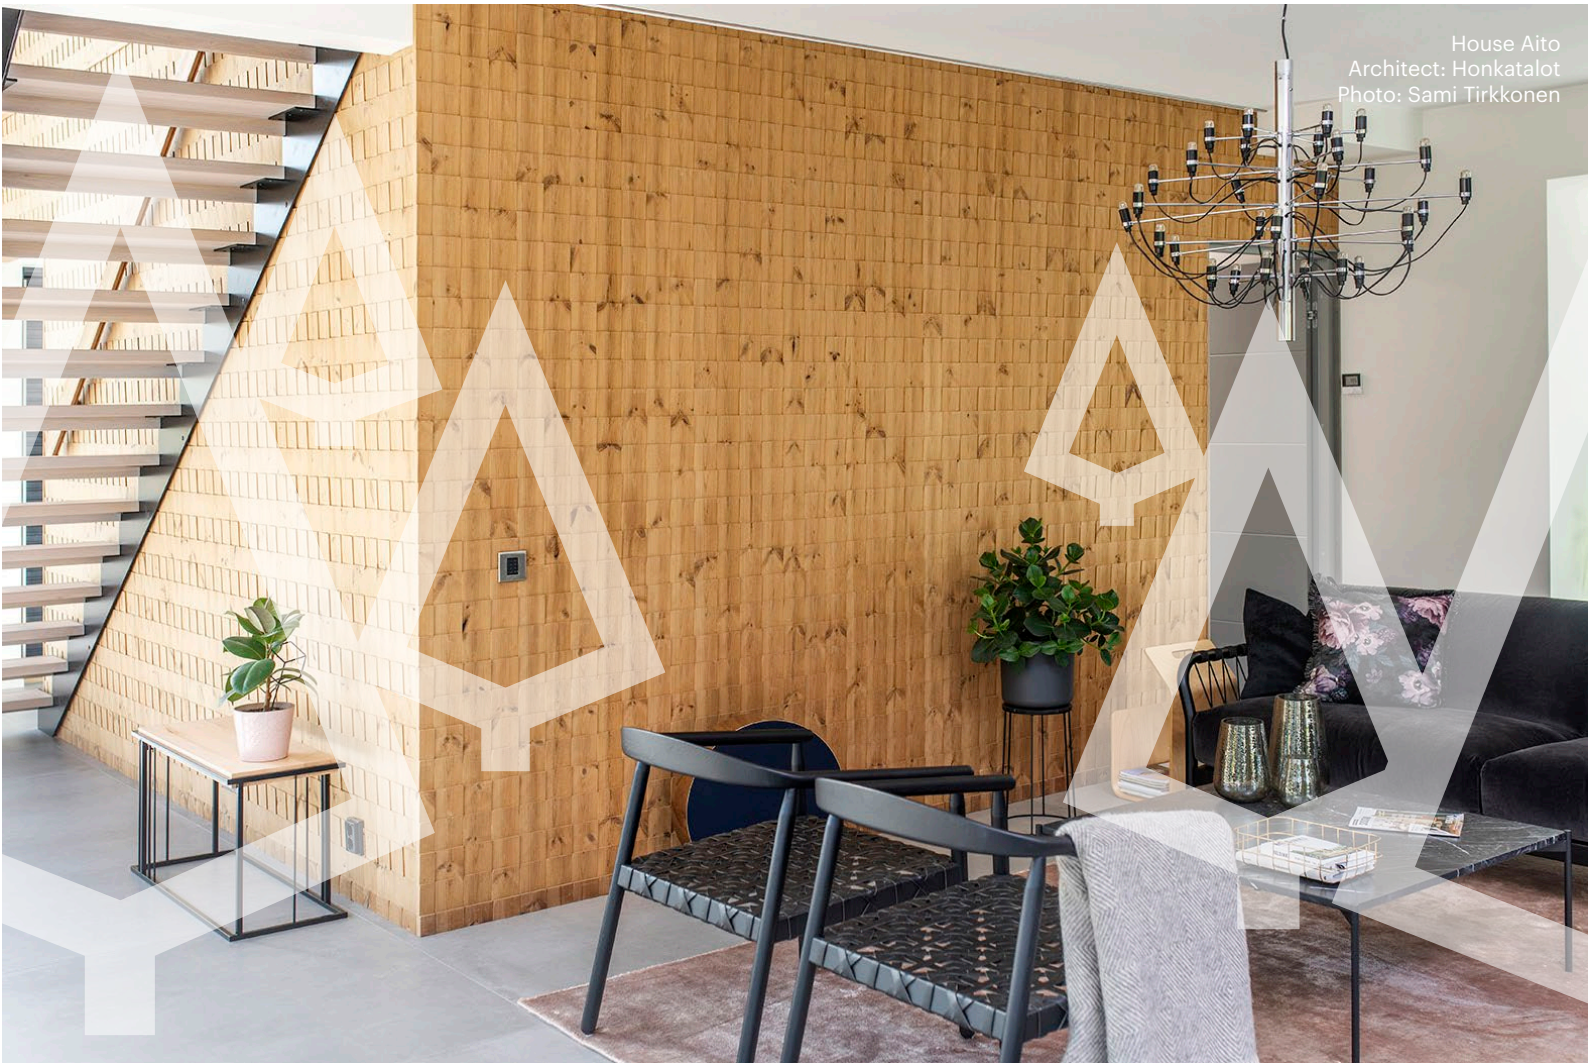

House Aito
Architect: Honkatalot
Photo: Sami Tirkkonen

JUKOLA 3D- TEXTURE 26X92


Guideline for Jukola 3D installation

Jukola 3D- texture with easy installation in indoor and outdoor use.

dimensions (mm)	26x92
class	LunaThermo-D
species	Nordic pine
length (m)	3,0
m/m ²	11,63
joist spacing (mm)	600



JUKOLA TEXTURE PLAIT 440-1

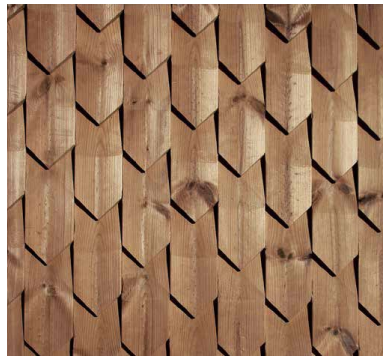

JUKOLA TEXTURE SHINGLE ARROW 220-1



JUKOLA TEXTURE STAR 430-OAB



JUKOLA TEXTURE CHIP 206-0



JUKOLA TEXTURE NET 207-1




JUKOLA TEXTURE DIAGONAL 201-1A

JUKOLA 3D- TEXTURE 26X92

Guideline for Jukola 3D installation

Before installing panels:

Before installing the panels, it is important to focus on creating the desired pattern. Place the panels next to each other e.g. on the floor and create the pattern that you want. Fit the height of the installation area to match the pattern in a way that the pattern is evenly distributed. Mark up cutting lines for the bottom and upper ends of the boards. Cut the boards based on the cutting lines and inspect the fitting of the boards against the final installation height. If you want to create an even pattern you can use two measurement boards to fix the pattern and help cutting all other boards. If it is necessary to continue individual boards, the seam is recommended to be placed on a straight line of the pattern.

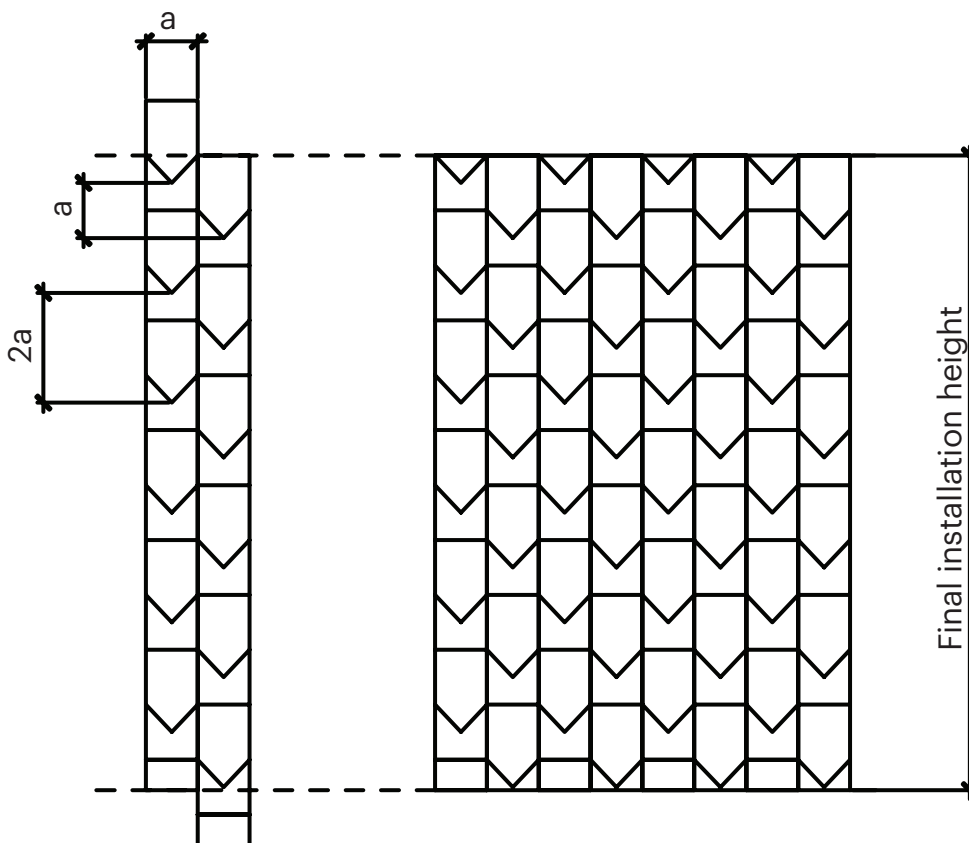


JUKOLA 3D- TEXTURE 26X92

Guideline for Jukola 3D installation

Installing the panels:

It is recommended that Jukola panels are installed with hidden screwing, leaving no visible screws on the surface of the pattern. Hidden screwing is done with a 3-4x45mm countersunk screw diagonally from the base of the tongue connector (look at the photo). If the panel is to be screwed on by the top, the countersunk screw can be hidden by screwing diagonally from the inner corners of the cut.

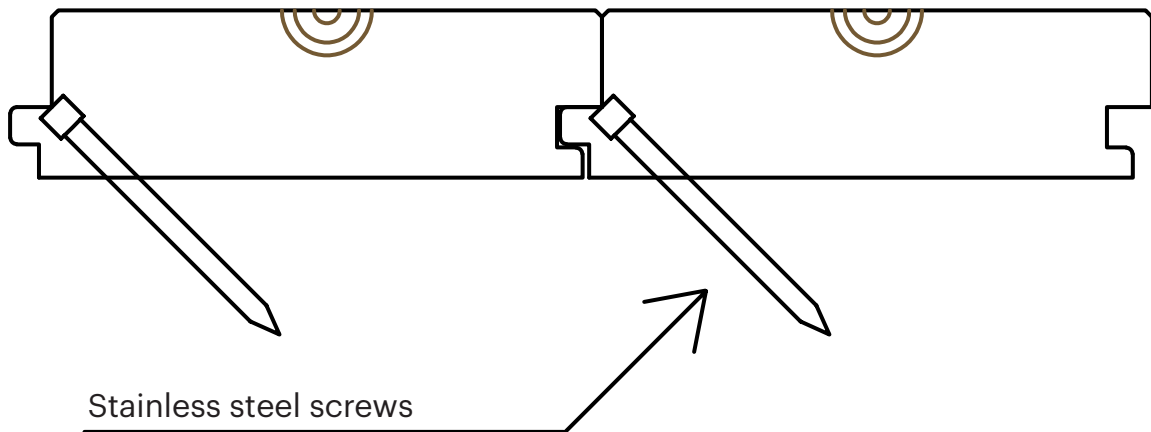

If you want to maintain the wood's natural brown color and avoid greying in the exterior applications, use tinted UV-resistant wood stain. The panels can be painted with brush or spray.

