



MOVABLE STRUCTURES

GUIDELINE




GARAGE DOORS

Guideline for movable structures

Due to the light weight and dimensional stability of Lunawood Thermowood, it is suitable for movable structures like in garage doors.

Side view:

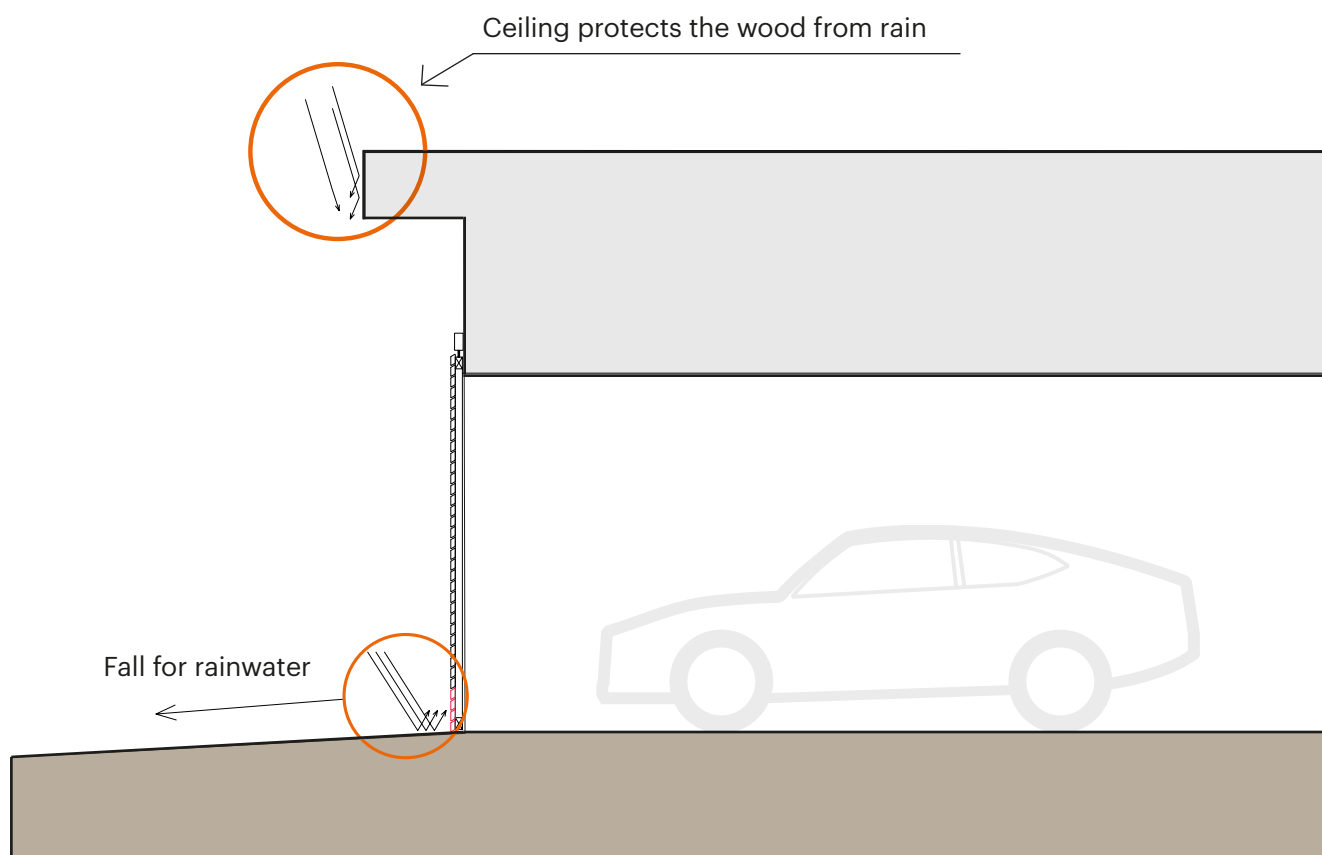


Provide adequate support structure
in accordance with your local
building regulations.

LUNAWOOD MOVABLE STRUCTURES

Guideline for movable structures

Example of sliding garage door:

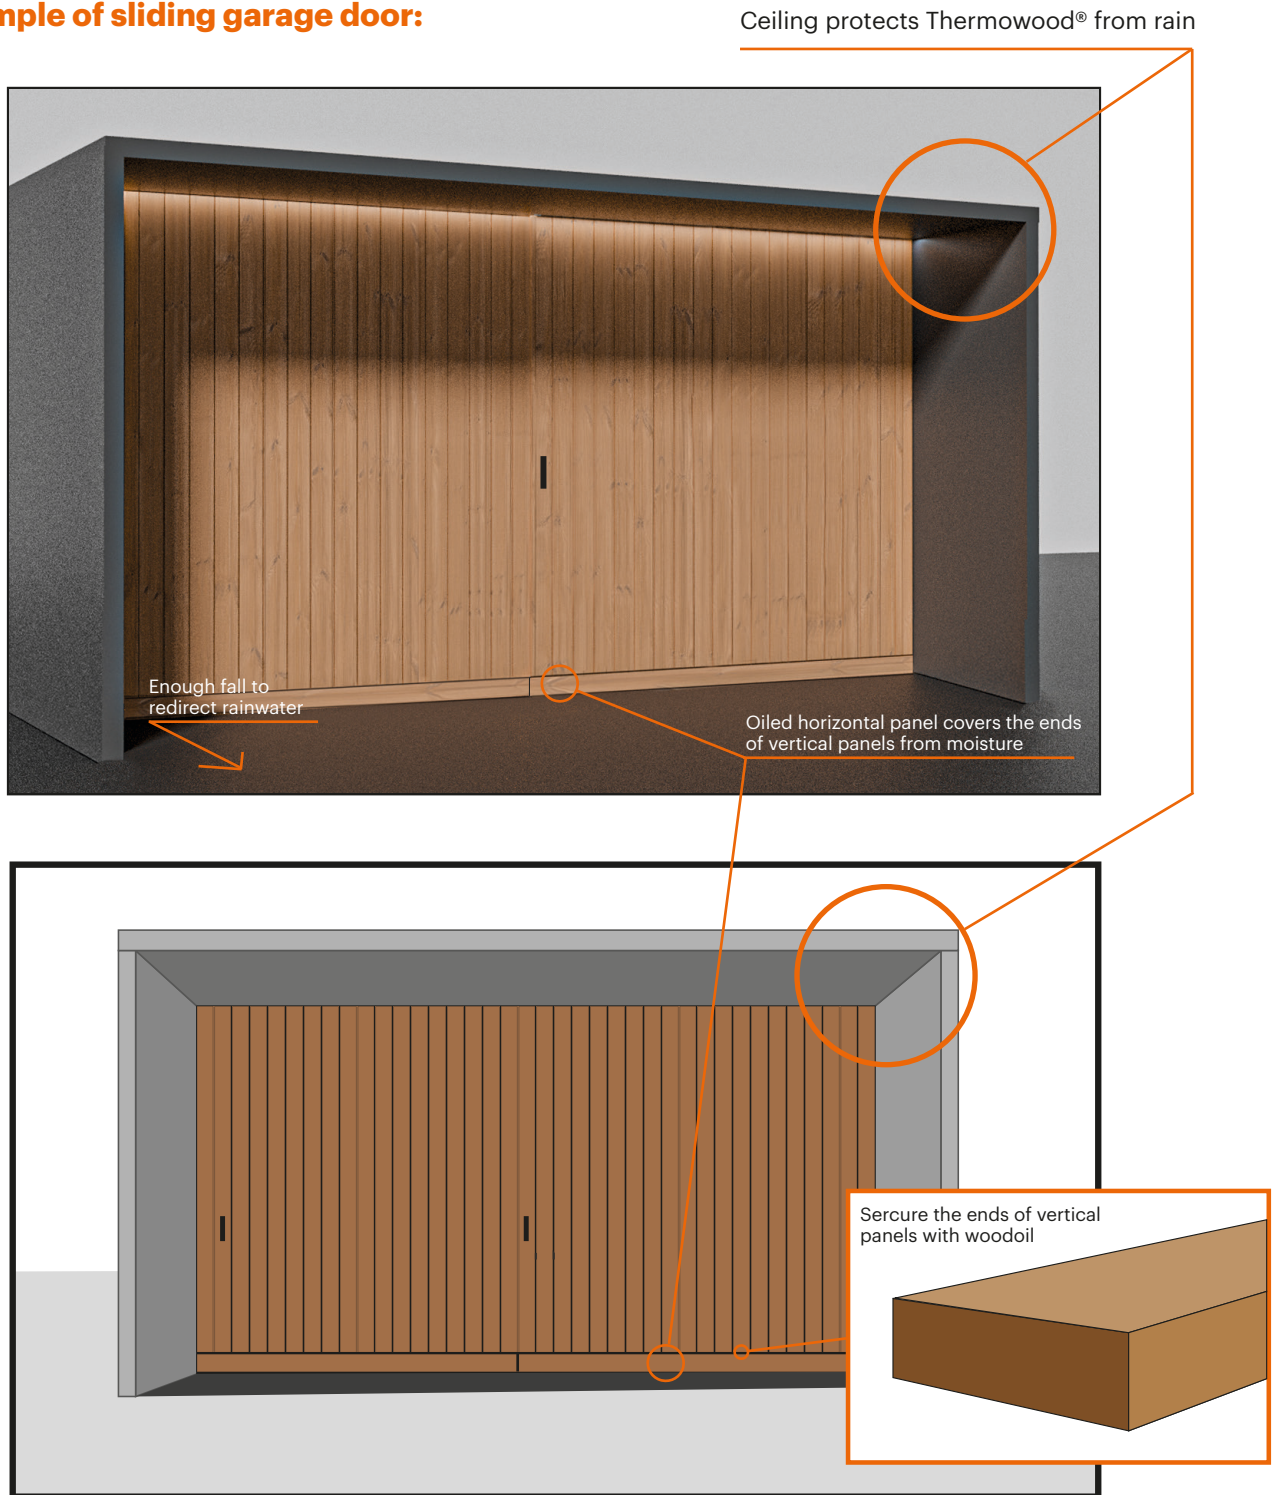


Provide adequate support structure
in accordance with your local
building regulations.

LUNAWOOD MOVABLE STRUCTURES

Guideline for movable structures

Lifted door:

Ceiling protects Thermowood® from rain

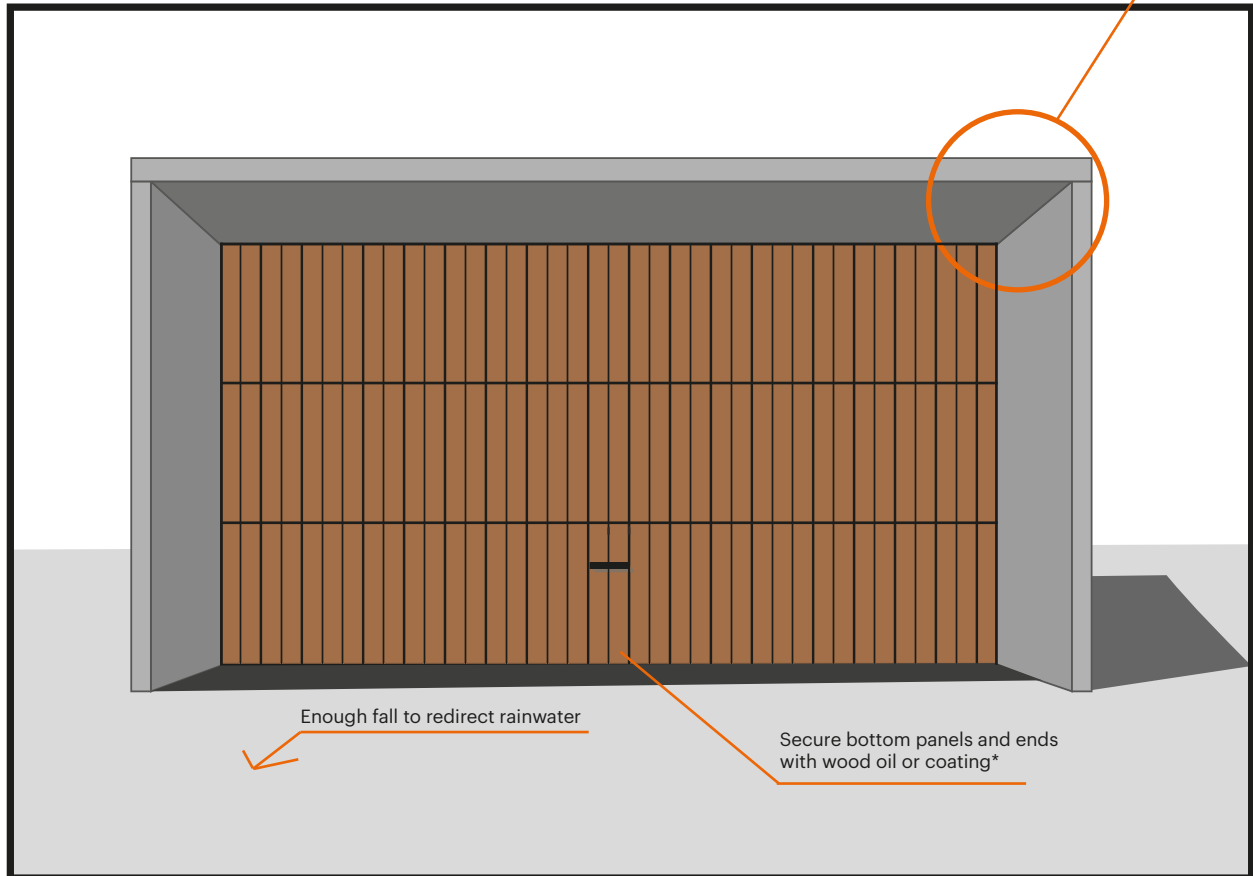

* When Lunawood Thermowood® is treated with clear woodoil, it will turn into silver gray due to the UV light of the sun if the wood oil doesn't contain UV-protection.

To preserve the brown tint of the wood, you should treat the panels immediately after installation using UV-protected and brown pigmented wood oil intended for thermally modified wood.

When only part of the structure has been oiled, the greying process might vary between untreated and oiled Lunawood Thermowood.

Provide adequate support structure
in accordance with your local
building regulations.