

Luna Panel System 1x5




CLADDING & PANELING

Crafted from Nordic pine, Luna Panel System family enables creating unique and modern wood surfaces by combining different panel widths of the family.

PRODUCT DETAILS

Product name	Luna Panel System 1x5
Actual dimensions	0.75 x 4.6 in. (19x117 mm)
Class	LunaThermo-D
Surface	Planed
Species	Pine, <i>Pinus sylvestris</i>
Lengths	9 ft 10.1 in. / 11 ft 9.7 in. – 16 ft 8.8 in. (3,0 / 3,6-5,1 m) (availability varies) Length package in 11.8 in. (30 cm) modules
Utility data	Coverage width 4.2 in, 2.88 ft/sq-ft (106 mm, 9,43 rm/m ²) Weight average ~0.58 lbs/ft, ~1.68 lbs/sq-ft (~0,9 kg/m ~8,2 kg/m ²)
Packaging	Package size 216 pcs (half package) 4 pcs/bundle, 54 bundels/package Package covered by Lunawood plastic hood on 5 sides
Article	19x117 Panel System T&G Thermo-D Rw A
Product specifications	Tolerances, quality and installation based on. Lunawood general rules and instructions. Nominal size: 1 x 4.92 in. (25x125 mm)

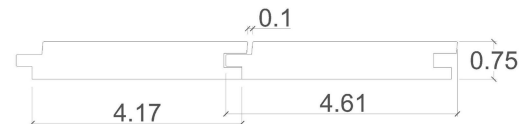

LUNAWOOD TECHNICAL DATASHEET

Essential Characteristics	Pine (<i>Pinus sylvestris</i>)	Harmonized European standard
Density	420 kg / m ³ 26.22 lbs/ft ³	SFS-EN 317
Reaction to fire class	Class B, FSI 75, SDI 200	ASTM E84
Screw traction resistance	19,45 ± 1,47 N/mm ² 2821.8 ± 213 psi	SFS-EN 13446
Thermal conductivity	0,09 W/(m·K)	EN ISO 13787 + EN 12667
Durability class	Class 2 Thermo-D	EN 350-1
Use class	Class 3 Thermo-D	EN 335
Stability, shrinking and swelling	Tangential fibre direction 4 % Radial fibre direction 2 %	SFS-EN 317
Equilibrium Moisture	6,4 %	EN 13183-1
Brinell Hardness	1,4 N/mm ² 203.05 psi*	SFS-EN 1534
Janka	1700 N 382 lbf*	ASTM D143-94
TVOC	173.34*	
CO2 emissions (EPD)	Thermo-D 0,077 mg/m ² h 117 kg CO ₂ eq/m ³ 7.30 lbs CO ₂ /ft ³	ISO 16000-9:2006 SFS-EN 16516:2017 Lunawood EPD

Use QR code by phone or click it to open to Your browser



Product documents



Design tools

Version: 2/2024