

Luna Decking HF 5/4x4


White Ash



DECKING

PRODUCT DETAILS

Size	1.02x3.50
Class	Luna TMT
Surface	Planed
Species	White Ash, <i>Fraxinus americana</i>
Lenghts	7' – 12' (availability varies) Length package in 1 ft (30 cm) modules
Utility data	Coverage width 3.75" 3.2 lft/sq-ft (1/4" gap) (95,3 mm, 10,5 rm/m², 6,35 mm gap) Weight average ~1.0 lbs/ft ~3.13 lbs/sq-ft (~1,5 kg/m ~15,3 kg/m²)
Packaging	Package size 220 pcs (Hardwood standard) Package covered by Lunawood plastic hood on 5 sides
Article	1.02x3.5 Batten TMT White Ash
Product specifications	Tolerances, quality and installation based on. Lunawood general rules and instructions. Nominal size: 5/4x4

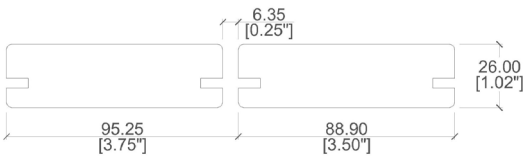

LUNAWOOD TECHNICAL DATASHEET

Essential Characteristics	White Ash (<i>Fraxinus americana</i>)	Harmonized European standard
Density	630 kg / m³ 39.3 lbs/ft³	SFS-EN 317
Reaction to fire class		ASTM E84
Screw traction resistance	2080 N, End-grain 1960N	SFS-EN 1382
Thermal conductivity	0.15 W/(mK)	EN ISO 10456
Durability class	Class 1	EN 350-1
Use class	Class 3	EN 335
Stability, shrinking and swelling	Tangential fibre direction 2.7 % Radial fibre direction 2.2 %	SFS-EN 317
Equilibrium Moisture		EN 13183-1
Brinell Hardness (HB)	3.3	SFS-EN 1534
Janka	7556 N	ASTM D143-94

Use QR code by phone or click
it to open to Your browser



Product
documents



Design
tools